


# VALANCES - ROD MOUNTED

## Quick Product Guide




Briscoe



Brooklyn



Danby

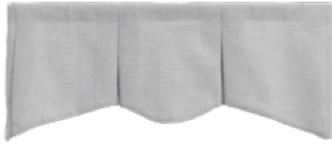


Lifton




Plaza I



Plaza II

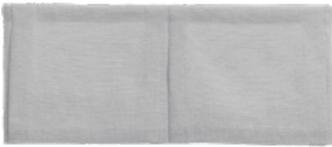

Spencer

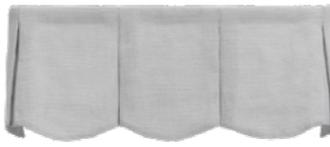

Summerton



Winchester


ROD MOUNTED VALANCE STYLE	STANDARD FEATURES						UPGRADES	
	Min. Width	Max. Width	Min. Long Point	Max. Long Point	Difference between Long and Short Points	Hardware Included	Contrast Lined	Contrast Ties
Briscoe	24"	108"	14"	18"	3"	Y	N	N
Brooklyn	24"	120"	14"	18"	0"	Y	N	N
Danby	24"	108"	20"	20"	7"	Y	N	Y
Lifton	24"	108"	12"	18"	4"	Y	N	N
Plaza I	24"	240"	12"	22"	0"	N	N	N
Plaza II	24"	240"	12"	22"	0"	N	N	N
Spencer	24"	108"	14"	18"	0"	Y	N	N
Summerton	24"	108"	12"	17"	2"	Y	N	N
Winchester	30"	240"	36"	63"	30" - 38"	Y	Y	N

S - Standard  
Y - Yes  
N - No

# BRISCOE

Valances - Rod Mounted

Pricing on page: [151](#)

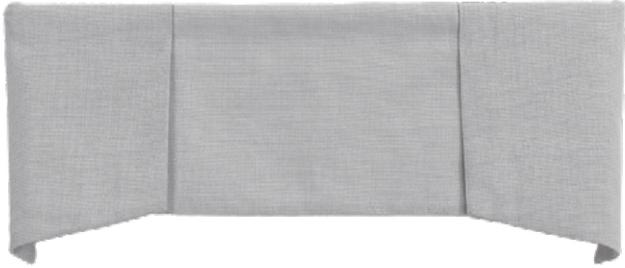

PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	108"
Long Point	14"	18"
Returns	2", 3", 5" ONLY	

STANDARD FEATURES

Description	Tailored, panel valance Approximately 3" difference between long and short points Pattern will elongate with width of treatment
Construction	Side panels approximately 11" wide - Determined by workroom
Included	Hardware is included
Lining	Center panel is lined with blackout lining, side panels are lined with face fabric
Thread	Sewn with color-coordinated thread


UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# BROOKLYN

Valances - Rod Mounted

Pricing on page: [151](#)

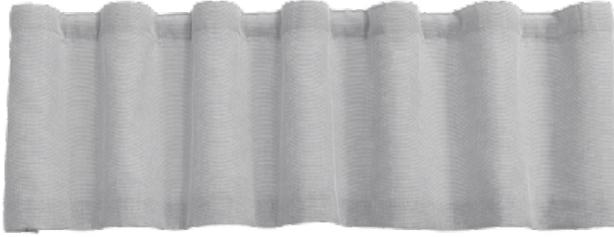

PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	120"
Long Point	14"	18"
Returns	2", 3", 5" ONLY	

STANDARD FEATURES

Description	Hidden tab valance
Construction	Back tabs are 1 1/2" wide 1 1/2 to 1 Fullness
Included	Hardware is included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# DANBY

Valances - Rod Mounted

Pricing on page: [152](#)



PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	108"
Long Point	20" ONLY	
Returns	2", 3", 5" ONLY	

STANDARD FEATURES

Description	Inverted pleat in center of valance with ties which pull up sides to create swag Short point is approximately 13"
Construction	Ties are approximately 1 1/2" wide One swag < 51", two swags 51" - 108"
Included	Hardware is included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread


Available? Notes

UPGRADES

Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	Y	Price according to more expensive of face/contrast fabric

**LIFTON**

Valances - Rod Mounted

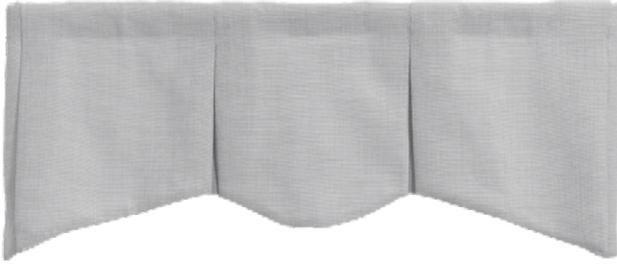Pricing on page: [152](#)PRODUCT  
DIMENSIONS

	Minimum	Maximum
Width	24"	108"
Long Point	12"	18"
Returns	2", 3", 5" ONLY	

## STANDARD FEATURES

Description	Curved box pleated valance Approximately 4" difference between long and short points
Construction	Scallops approximately 13" wide - Determined by workroom
Included	Hardware is included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

## UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# PLAZA I

Valances - Rod Mounted

Pricing on page: [153](#)



PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	240"
Long Point	12"	22"
Returns	1 1/2"	11"

STANDARD FEATURES

Description	Pinch pleated valance
Construction	Available in Three Finger Pinch Pleat or Inverted Pleat, 5 pleats per width, pre-pinned — Three Finger Pinch Pleat: Three fold pleat with buckram tacked 3 1/2" from top of valance — Inverted Pleat: Three fold pleat with buckram tacked 1/2" from top of valance Specify fullness: 3 to 1 – 2 1/2 to 1 – 2 to 1
Included	Hardware is NOT included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# PLAZA II

Valances - Rod Mounted

Pricing on page: [153](#)



PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	240"
Long Point	12"	22"
Returns	0"	11"

STANDARD FEATURES

Description	Rod pocket valance
Construction	Specify: — Pocket size — Header size (Optional header that gathers on rod to desired width) — Fullness: 3 to 1 – 2 1/2 to 1 – 2 to 1
Included	Hardware is NOT included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

Take Up Need & Pocket Size Chart	Rod Diameter	Take Up	Pocket Size	<b>This chart is to be used as a guide only.</b> — Take up will vary with the weight of the fabric and lining selected. — Rod pocket sizes available: 1/2" to 6 1/2" — Header included in finished length and determined by Decorative Rod Diameter
	1"	3/4"	2 1/2"	
	1 3/8"	1"	3"	
	2"	1 1/2"	4"	
	3"	2"	5 1/2"	


UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# SPENCER

Valances - Rod Mounted

Pricing on page: [154](#)

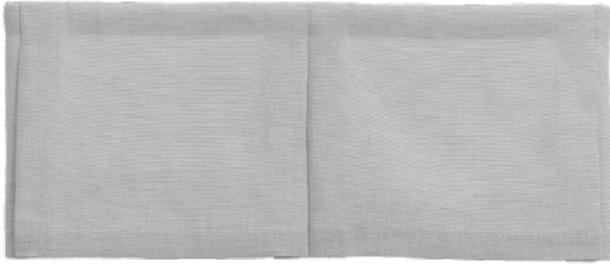

PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	108"
Long Point	14"	18"
Returns	2", 3", 5" ONLY	

STANDARD FEATURES

Description	Inverted box pleated valance
Construction	Pleats are approximately every 27" - Determined by workroom
Included	Hardware is included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	

# SUMMERTON

Valances - Rod Mounted

Pricing on page: [154](#)



PRODUCT DIMENSIONS

	Minimum	Maximum
Width	24"	108"
Long Point	12"	17"
Returns	2", 3", 5" ONLY	

STANDARD FEATURES

Description	Scalloped box pleated valance Approximately 2" difference between long and short points
Construction	Scallops are approximately 13" wide - Determined by workroom
Included	Hardware is included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	N	
Contrast Ties	N	



## WINCHESTER

Valances - Rod Mounted

Pricing on page: [155 - 156](#)

### PRODUCT DIMENSIONS

	Minimum	Maximum
Width	30"	240"
Short Point	6"	25"
Long Point	36"	63"
Returns	0"	11"

### STANDARD FEATURES

Description	Rod pocket, tapered valance
Construction	Specify: — Pocket size — Header size (Optional header that gathers on rod to desired width) — Fullness: 3 to 1 – 2 1/2 to 1 – 2 to 1
Included	Hardware is NOT included
Lining	Lined with white lining
Thread	Sewn with color-coordinated thread

Take Up Need & Pocket Size Chart	Rod Diameter	Take Up	Pocket Size	<b>This chart is to be used as a guide only.</b> — Take up will vary with the weight of the fabric and lining selected. — Rod pocket sizes available: 1/2" to 6 1/2" — Header included in finished length and determined by Decorative Rod Diameter
	1"	3/4"	2 1/2"	
	1 3/8"	1"	3"	
	2"	1 1/2"	4"	
	3"	2"	5 1/2"	

### UPGRADES

	Available?	Notes
Banding Application	N	
Trim Application	N	
Contrast Lined	Y	Price according to the more expensive of face/contrast fabric
Contrast Ties	N	
Extended Long Point	Y	46" - 63" available, use correct price charts for extended lengths